

THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS COVERED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTE:

1. SWITCH: UNIDIRECTIONAL, NORMALLY OPEN, AUTOMATICALLY RESETTABLE
2. WEIGHT: 2 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY OPEN
4. CONTACT RESISTANCE: 10 OHMS MAXIMUM
5. CONTACT RATING: 50MA AT FOR 2 MINUTES
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM
7. OPERATING CHARACTERISTICS: (C)
  - a) CONTACTS SHALL REMAIN OPEN AT STEADY STATE ACCELERATIONS OF: SEE TABLE FOR G LEVEL +/-15%.
  - b) CONTACTS SHALL BE CLOSED AT: SEE TABLE FOR G LEVEL +/-15%.
8. TEMPERATURE RANGE:
  - a) HIGH TEMPERATURE: +160°F TO +220°F
  - b) LOW TEMPERATURE: -65°F
  - c) STORAGE TEMPERATURE: -65°F TO +160°F
9. SHOCK TEST: HALF SINE SHOCK EVENT, 80 G PEAK ACCELERATION FOR 11MS DURATION, 6 SHOCKS POSITIVE AND 6 SHOCKS NEGATIVE
10. SWITCH SEAL: HERMETIC; PER MIL-STD-750C, METHOD 1071
11. LEAD STRENGTH: 5 LBS. MINIMUM AXIAL PULL

2044-SEE TABLE SAL-000

REVISIONS			
ALT	DESCRIPTION	BY	CHK
A	SEE ECN2044-SEE SAL-000A TABLE	AHN 10/24/02	
B	SEE ECN2044-SEE SAL-000B TABLE	AHN 2/3/05	
C	SEE ECN2044-SEE SAL-000C TABLE	AHN 6/18/16	

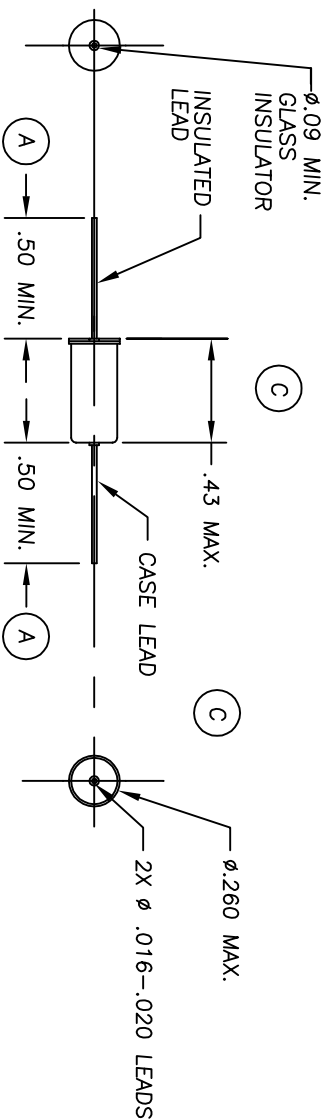


TABLE 1

NOMINAL g'S	g LEVEL TOLERANCE	SELECT CONTROLS P/N
44	+15%/-15%	2044-1SAL-000
163	+15%/-15%	2044-3SAL-000
368	+15%/-15%	2044-5SAL-000
654	+15%/-15%	2044-7SAL-000
1022	+15%/-15%	2044-11SAL-000

BILL OF MATERIAL

QTY	NO.	PART NO.	DESCRIPTION	REMARKS

MATERIAL	
FINISH	
DO NOT SCALE DRAWING REMOVE BURRS, BREAK SHARP EDGES. TOLERANCE UNLESS SPECIFIED: FRACTION: 1/64 ANGLE: 45°/30° DEC: .005 ±.005 FINISH: 125 R/S	

TITLE	SWITCH, SPIN
SCALE:	2:1
WEIGHT:	
DRAWN	AHN
CHECKED	
APPROVED	
DATE	3/28/02
DWG. NO.	2044-SEE TABLE SAL-000
SHEET	1 OF 1
REV	C

45-3 KNICKERBOCKER AVE.  
BOHEMIA, N.Y. 11716

select controls Inc.