


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVERTED WITH THE EXPRESS CON-
 ITION THAT IT AND THE INFORMATION CONTAINED IN IT
 ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN
 WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EX-
 PRESS WRITTEN CONSENT OF SELECT CONTROLS INCORP-
 ORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR
 TO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.

NOTES:

1. WEIGHT: 4.0 GRAMS MAXIMUM
2. SENSITIVE TO: TIP-OVER AND/OR TILT
3. CONTACT OPTIONS: NORMALLY OPEN OR
NORMALLY CLOSED, CASE GROUND
4. CONTACT SPECIFICATIONS: RATING - 200mA @ 24 VDC
RESISTANCE - < 350 OHMS
5. INSULATION RESISTANCE: 30 MEGOHMS @ 500 VDC
6. OPERATING CHARACTERISTICS;
VARIABLE-DEPENDENT ON MOUNTING ANGLE
OR ORIENTATION
7. TEMPERATURE: OPERATING - 65° TO +185°F
NON-OPERATING - 65° TO +235°F
8. SWITCH IS DAMPED AND HERMETICALLY SEALED (B)
9. CASE LEAD AND HEADER WELD STRENGTH:
3 POUNDS MINIMUM AXIAL PULL WITHOUT
DAMAGE

REVISIONS			
ALT	DESCRIPTION	BY	CHK ENG
A	SEE ECN4001-1-000A	AHN 6/29/03	
B	SEE ECN4001-1-000B	AHN 7/18/04	

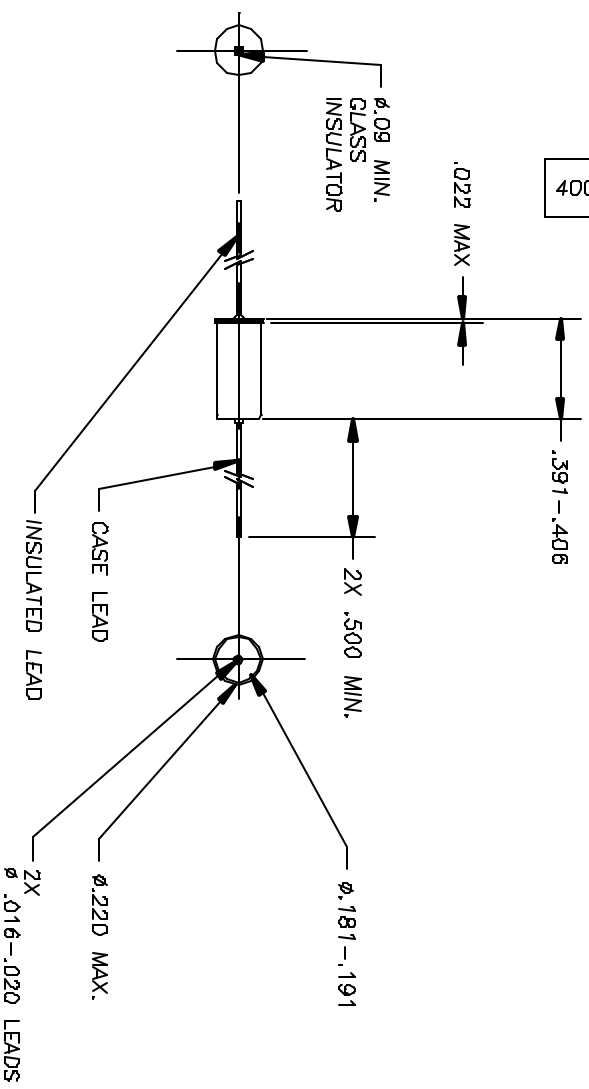

4001-1-000

B

REV	DATE	PART NO.	DESCRIPTION	REMARKS
			BILL OF MATERIAL	

MATERIAL		TITLE	
FINISH		SWITCH, TIP-OVER/TILT	

DO NOT SCALE DRAWING	NO. OF	NO. OF	SCALE	DATE	DRAWING NO.	REV
REMOVE BURRS, BREAK SHARP EDGES	REVISIONS	REVISIONS	2:1	1/7/01	4001-1-000	B
TOLERANCES UNLESS SPECIFIED ARE ± .005			NOTED			
WELDING TO BE PERFORMED BY QUALIFIED PERSONNEL						
MATERIAL FINISH - RAS						

Select Controls Inc.
 350 I CENTRAL AVE.
 BOHEMIA, N.Y. 11716