

THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVEYED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.


NOTES:

1. SWITCH: PLANAR TILT, OMNIDIRECTIONAL, NORMALLY OPEN, AUTOMATICALLY RESETTABLE
2. WEIGHT: 5 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY OPEN
4. CONTACT RESISTANCE: 1000 OHMS MAXIMUM
5. CONTACT RATING: 250 MA AT 24 VDC
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM AT 500 VDC
7. OPERATING CHARACTERISTICS:
 - a) MUST CLOSE WHEN TILTED PAST 45°+/- 5° FROM VERTICAL POSITION
 - a) MUST OPEN WHEN RETURNED TO VERTICAL POSITION
8. OPERATING TEMPERATURE RANGE: -65 DEGREES F TO +275 DEGREES F
9. SWITCH SEAL: HERMETIC
10. LEAD STRENGTH: 3 LBS. MINIMUM AXIAL PULL

5008-1-000

A

REVISIONS				
ALT	DESCRIPTION	BY	CHK	ENG
A	CHANGES SEE ECN5008-1-000A	BJE 12/22/20		

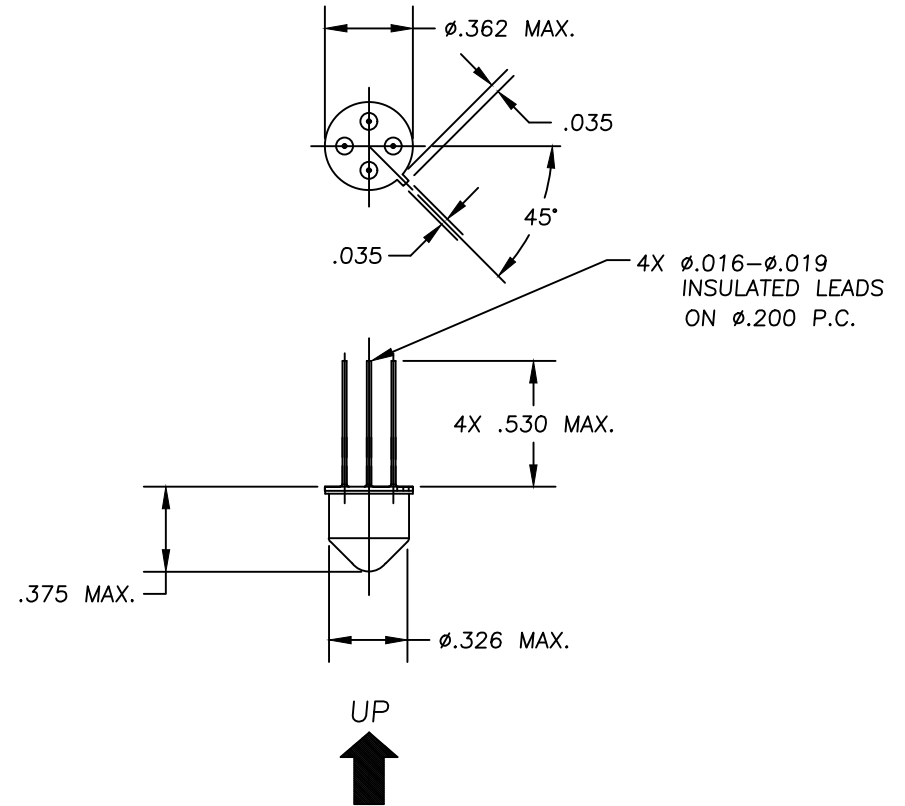

ITEM NO.	NO. REQ'D	PART NO.	DESCRIPTION	REMARKS						
BILL OF MATERIAL										
MATERIAL _____		TITLE TILT SWITCH, 45° NORMALLY OPEN		45-3 KNICKERBOCKER AVE. BOHEMIA, N.Y. 11716						
FINISH _____										
DO NOT SCALE DRAWING REMOVE BURRS, BREAK SHARP EDGES. TOLERANCE UNLESS SPECIFIED: FRACT: ±1/64 ANGLE: ±0°30" MACH FINISH: 125/ DEC: .00 ±.010 RMS DEC: .000 ±.005		NO. REQ'D	N/A	NO. REQ'D	N/A	SCALE: 1:1	DRAWN: AHN	5/27/00	DRAWING NO.	REV
						WEIGHT: NOTED	CHECKED: ENGINEER: APPROVED: APPROVED:		5008-1-000	A
							DATE	SHEET	1	OF 1