


THIS DOCUMENT IS THE PROPERTY OF SELECT CONTROLS INCORPORATED AND IS CONVEYED WITH THE EXPRESS CONDITION THAT IT AND THE INFORMATION CONTAINED IN IT ARE NOT TO BE USED, DISCLOSED, OR REPRODUCED IN WHOLE OR IN PART, FOR ANY PURPOSE WITHOUT THE EXPRESS WRITTEN CONSENT OF SELECT CONTROLS INCORPORATED; AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.


5026-1-000

REVISIONS				
ALT	DESCRIPTION	BY	CHK	ENG

NOTES:

1. SWITCH: PLANAR TILT, OMNIDIRECTIONAL,
NORMALLY CLOSED, AUTOMATICALLY RESETTABLE
2. WEIGHT: 5 GRAMS MAXIMUM
3. CONTACTS: SPST, NORMALLY CLOSED
4. CONTACT RESISTANCE: 10 OHMS MAXIMUM
5. CONTACT RATING: 250 MA AT 24 VDC
6. INSULATION RESISTANCE: 30 MEGOHMS MINIMUM
AT 500 VDC
7. OPERATING CHARACTERISTICS:
 - a) MUST OPEN WHEN TILTED PAST 13° +/- 4° FROM VERTICAL POSITION
 - a) MUST CLOSE WHEN RETURNED TO VERTICAL POSITION
8. OPERATING TEMPERATURE RANGE:
-65 DEGREES F TO +275 DEGREES F
9. SWITCH SEAL: HERMETIC
10. LEAD STRENGTH: 3 LBS. MINIMUM AXIAL PULL

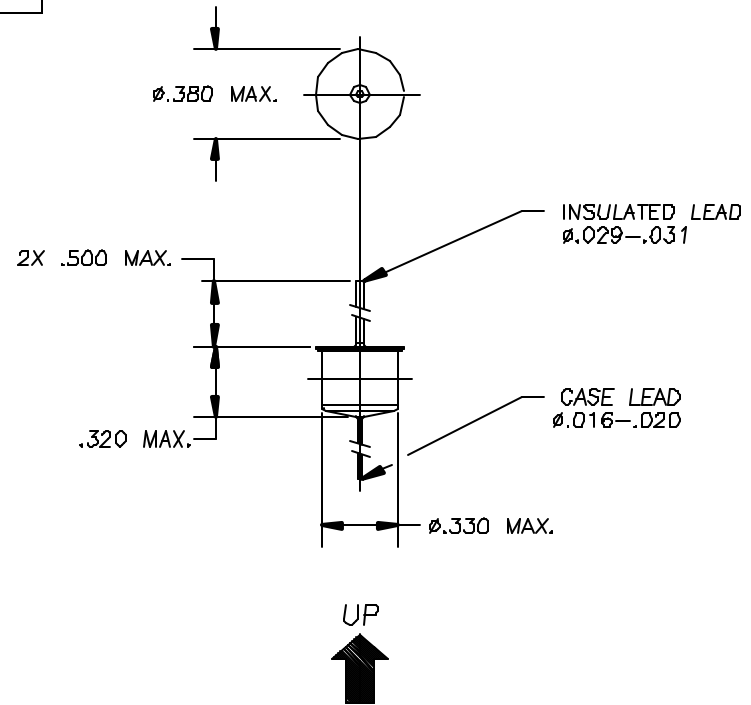

ITEM	NO.	PART NO.	DESCRIPTION	REMARKS	
BILL OF MATERIAL					
MATERIAL _____			TITLE TILT SWITCH 13° +/- 4° NORMALLY CLOSED		
FINISH _____			 45-3 KNICKERBOCKER AVE. BOHEMIA, N.Y. 11716		
DO NOT SCALE DRAWING REMOVE BURRS, BREAK SHARP EDGES TOLERANCES UNLESS SPECIFIED: FRACT: ±1/64 ANGLE ±0.30° MACH FINISH 125/ RFB DEC: 80 ±.010 DEC: 900 ±.005		NO. REQ'D N/A	NO. REQ'D N/A	SCALE: 2:1	DESIGNER: .AHN. DATE: 6/30/06
		WEIGHT: NOTED		APPROVED: [Signature] DATE: [Blank]	
			DRAWING NO. 5026-1-000	REV	
			SHEET 1 OF 1		